

Energy Management Modular Power Quality Transducer Type PQT-90



- MODBUS RTU, JBUS protocol
- Transmission and reception of SMS messages (variables and alarm status)
- Data transmission and reception by means of analogue modem
- Up to 4 optional pulse outputs
- Up to 4 optional alarm outputs
- Up to 4 optional analogue outputs
- Universal power supply: 18-60VAC/VDC, 90-260 VAC/VDC

Product Description

Power quality transducer which can be used in 3 different operating modes:

- direct measurements for the power quality analysis (LV or MV/HV connection);
- indirect energy and power measurements by means of watt-hour meters (LV or MV/HV connection);
- direct measurements for the instantaneous variables (LV connection) and indirect measure-

ments for the energy variables (LV or MV/HV).

It's possible to add the management of gas and water metering to all of these working modes.


Automatic transmission of SMS alarm messages.

Remote read-out from GSM mobile phones of all the instantaneous variables, the last variables available in the data logging and the energy meters.

- Class 0.5 (current/voltage)
- Universal transducer: energy, water and gas
- 32-bit μ P-based multifunction power transducer
- Front size: 90x90 mm
- Measurement of single phase and system instantaneous variables: W, Wdmd, var, var dmd, VA, VA dmd, PF, PF avg, V_{LN} , V_{LL} , A_L , A_n , Hz, THD (for all measurements max and min values)
- Measured energies: kWh and kvarh on 4 quadrants
- Current and voltage inputs with autoranging capability
- 48 independent energy meters to be used as single, dual, multi-time energy management
- Interface with watt-hour meters by means of digital inputs (+kWh, +kvarh, -kWh, -kvarh)
- Interface with gas and water meters by means of digital inputs (one water meter, two gas meters to be used as single or dual time management)
- Harmonic distortion analysis (FFT) up to the 50th harmonic (current and voltage)
- Harmonics source detection
- Optional RS422/485 serial port
- Optional RS232 + real time clock function and 2Mb data logging of alarms, MIN/MAX events and up to 8 variables with programmable time interval.

How to order

PQT-90 AV53H XX XX XX XX X

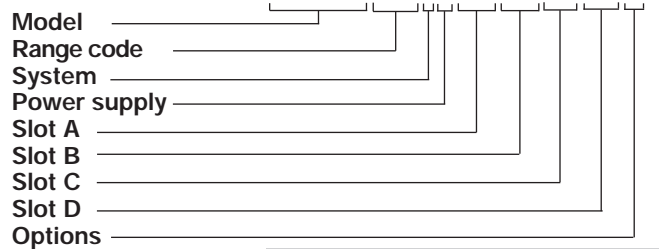

How to order

**PqtSoft Network
PqtSoft Remote**

PqtSoft Network: program to download memory data and to manage a modem. PqtSoft Remote: programm to set all the programming parameters.

Type selection

Range code (on request)	Slot A (interfacing cont.)	Slot B (communication)	Slot C (alarm or pulse)
XXX: None	B1: Dual analogue output, 20mADC ¹⁾	XX: None	XX: None
AV5: 240/415 VAC-1/5 AAC (max. 300 V (L-N)/520 V (L-L) - 6 A)	B2: Dual analogue output, ± 5 mADC ¹⁾	S1: Serial output, RS485 multidrop, bidirectional	R1: Single relay output (AC1-8AAC, 250VAC)
AV7: 400/690VAC - 1/5 AAC (max. 480V (L-N) / 830 V (L-L) / 6 A)	B3: Dual analogue output, ± 10 mADC ¹⁾	B1: Dual analogue output, 20mADC ¹⁾	R2: Dual relay output, (AC1-8AAC, 250VAC)
Power supply	B4: Dual analogue output, ± 20 mADC ¹⁾	B2: Dual analogue output, ± 5 mADC ¹⁾	O1: Single open collector output (30V/100mADC)
L: 18 to 60VAC/VDC	V1: Single analogue output, 10VDC ¹⁾	B3: Dual analogue output, ± 10 mADC ¹⁾	O2: Dual open collector output (30V/100mADC)
H: 90 to 260VAC/VDC	V2: Single analogue output, ± 1 VDC ¹⁾	B4: Dual analogue output, ± 20 mADC ¹⁾	D1: 3 digital inputs for voltage-free contacts
Slot A (interfacing)	V3: Single analogue output, ± 5 VDC ¹⁾	W1: Dual analogue output, 10VDC ¹⁾	D2: 3 universal digital inputs + excitation output (16-24VDC)
XX: None	V4: Single analogue output, ± 10 VDC ¹⁾	W2: Dual analogue output, ± 1 VDC ¹⁾	Slot D (alarm or pulse)
D2: 3 universal digital inputs + excitation output (16-24VDC)	W1: Dual analogue output, 10VDC ¹⁾	W3: Dual analogue output, ± 5 VDC ¹⁾	XX: None
A1: Single analogue output, 20mADC ¹⁾	W2: Dual analogue output, ± 1 VDC ¹⁾	W4: Dual analogue output, ± 10 VDC ¹⁾	R2: Dual relay output, (AC1-8AAC, 250VAC)
A2: Single analogue output, ± 5 mADC ¹⁾	W3: Dual analogue output, ± 5 VDC ¹⁾	Options	O2: Dual open collector output (30V/100mADC)
A3: Single analogue output, ± 10 mADC ¹⁾	W4: Dual analogue output, ± 10 VDC ¹⁾	X: None	O4: Four open collector output (30V/100mADC)
A4: Single analogue output, ± 20 mADC ¹⁾	Note: Slot A + Slot B Max 4 analogue outputs. Slot C + Slot D max 4 digital outputs. ¹⁾ On request	M: Serial port RS232+RTC+ 2Mb or Data memory to store all events, continuous record up to 8 variables and load profile W_{dmd}	
		E1: WEB-server option	

Input specifications

Number of analogue inputs		Energies (@ 25°C ± 5°C, R.H. ≤ 60%)	Active: class 1 according to EN61036 Reactive: class 2 according to EN61268 Ib: 5A, I _{max} : 6A 0.1Ib: 500mA, Start-up current: 20mA Un: 240V (AV5), 400V (AV7) 1% FS (FS: 100%) phase: ±2°; I _{min} : 0.1Arms; I _{max} : 15Ap; U _{min} : 50V _{RMS} ; U _{max} : 500Vp Sampling frequency: 6400 samples/s @ 50Hz
Current	1 (1-phase; system code: 3) 3 (3-phase; system code: 3)		
Voltage	1 (1-phase; system code: 3) 4 (3-phase; system code: 3)		
Digital inputs		Harmonic distortion (@ 25°C ± 5°C, R.H. ≤ 60%)	
AQ1038	No. of inputs: 3 (voltage-free)		
Purpose	W _{dmd} measurement synchronization + var _{dmd} and PF _{dmd} . Interfacing with watt-hour meters (+kWh, +kvarh). Tariff selection: energy. <8mA/ 17.5 to 25VDC		
Contact measuring current	Number of inputs: 3 + excitation output		
AQ1042	W _{dmd} measurement synchronization + var _{dmd} and PF _{dmd} . Interfacing with watt-hour meters (-kWh, -kvarh) or/and measurements of gas /water m ³ . Tariff selection: energy or GAS. 16V<+Aux<24VDC Max 15mA 15mA	Additional errors	
Purpose		Humidity	≤ 0.3% RDG, 60% to 90% R.H.
Contact measuring current		Input frequency	≤ 0.4% RDG, 62 to 400 Hz
Common characteristics		Magnetic field	≤ 0.5% RDG @ 400 A/m
Excitation output			NOTE: all accuracies are referred to measurements carried out with the analogue input module
Contact measuring current			
Input frequency	Max 20 Hz, dutycycle 50%	Temperature drift	≤ 200ppm/°C
Close contact resistance	Max 1kΩ	Sampling rate	6400 samples/s @ 50Hz
Open contact resistance	Min 100kΩ	Measurements	Current, voltage, power, energy, power factor, frequen- cy, harmonic distortion (see "Display Pages"). TRMS measurement of a distorted wave (voltage/current) . Direct. ≤3, max. 15Ap/500Vp "AV5" (L-N), 15Ap/800Vp "AV7" (L-N)
Insulation	4000VRMS	Coupling type	
Max. input number	6 in the configuration: AQ1038+AQ1042 or 2* AQ1042	Crest factor	
Accuracy (display, RS232, RS485)	In: 5A, I _{f.s.} : 6A Un: 240VL-N, V _{f.s.} : 300VL-N ±0.5% RDG (0.2 to 1.2 In) ±5mA (0.02 to 0.2 In) ±1% RDG (0.2 to 1.2 In)	Ranges (impedances)	
Current (A _{L1} , A _{L2} , A _{L3}) (@ 25°C ± 5°C, R.H. ≤ 60%)	±0.5% RDG (0.2 to 1.2 In) ±5mA (0.02 to 0.2 In) ±1% RDG (0.2 to 1.2 In)	AV5	58/100 V (> 500 kΩ) - 1 AAC (≤ 0.3 VA) 58/100 V (> 500 kΩ) - 5 AAC (≤ 0.3 VA) 240 V/415 V (> 500 kΩ) - 1 AAC (≤ 0.3 VA) 240 V/415 V (> 500 kΩ) - 5 AAC (≤ 0.3 VA)
Current (A _n) @ 40 to 100 Hz	±0.5% RDG (da 48 a 300 V _{L-N}) ±1% RDG (from 84 to 519V _{L-L}) ±0.5% RDG (da 80 a 480 V _{L-N}) ±1% RDG (from 139 to 830V _{L-L})	AV7	100/170 V (> 500 kΩ) - 1 AAC (≤ 0.3 VA) 100/170 V (> 500 kΩ) - 5 AAC (≤ 0.3 VA) 400/690 V (> 500 kΩ) - 1 AAC (≤ 0.3 VA) 400/690 V (> 500 kΩ) - 5 AAC (≤ 0.3 VA)
Voltage range AV5:			
Voltage range AV7:			
(@ 25°C ± 5°C, R.H. ≤ 60%)			
Frequency	Includes also: frequency, power supply and output load influences ±0.1% RDG (40 to 440 Hz)		
Active power (@ 25°C ± 5°C, R.H. ≤ 60%)	±0.5% (RDG + FS) (PF 0.5 L/C, 0.1 to 1.2 In, range AV5) or ±1% RDG (PF 0.5 L/C, 0.1 to 1.2 In, range AV5)	Frequency	40 to 440 Hz
Reactive power (@ 25°C ± 5°C, R.H. ≤ 60%)	±0.5% (RDG + FS) (PF 0.5 L/C, 0.1 to 1.2 In, range AV5) or ±1% RDG (PF 0.5 L/C, 0.1 to 1.2 In, range AV5)	Overload protection	
Apparent power (@ 25°C ± 5°C, R.H. ≤ 60%)	±0.5% (RDG + FS) (0.1 to 1.2 In, range AV5) or ±1% RDG (0.1 to 1.2 In, range AV5)	Continuous: voltage/current:	AV5: 300V _{L-N} / 500V _{L-L} / 6A AV7: 480V _{L-N} / 830V _{L-L} / 6A
		For 1s: voltage/current:	AV5: 600V _{L-N} /1040V _{L-L} /120A AV7: 960V _{L-N} /1660V _{L-L} /120A

Output Specifications

Analogue outputs (on request)		
Number of outputs	Up to 4 (on request)	0 to ±10 mADC,
Accuracy	±0.2% f.s. (@ 25°C ± 5°C, R.H. ≤ 60%)	0 to ±5 mADC
Range	0 to 20 mADC, 0 to ±20 mADC	0 to 10 VDC, 0 to ±10 VDC 0 to ±5 VDC 0 to ±1 VDC

Output specifications (cont.)

Scaling factor	Programmable within the whole range of retransmission; it allows the retransmission management of all values from: 0 to 20 mADC, 0 to ±20 mADC 0 to ±10 mADC, 0 to ±5 mADC 0 to 10 VDC, 0 to ±10 VDC 0 to ±5 VDC 0 to ±1 VDC	Baud rate Protocol Other features	9600, 38400 bit/s MODBUS RTU (JBUS) As per RS422/485
Variables to be retransmitted	All (see table "List of the variables that can be connected to:...")	Communication by modem Analogue modem	For the remote communication of all the data measured and managed by PQT. External communication Modem. Recommended type: US Robotics For the transmission of SMS messages: alarms, instantaneous variables, last available variables of data logging (only average values) and energy meters. The alarm messages are given with the date and the time of the event. The type and value of the set-point can be put into the alarm message (max 99 characters). The alarms can also be transmitted automatically, while the variables can be recalled by means of special SMS question codes. Siemens kit (external) model "TC35 TERMINAL" included GSM module, antenna and 230V power supply.
Response time	≤ 200 ms typical (filter excluded, FFT excluded)	GSM Modem	
Ripple	≤ 1% according to IEC 60688-1 and EN 60688-1		
Temperature drift	≤ 200 ppm/°C		
Load: 20 mA output ±20 mA output ±10 mA output ± 5 mA output 10 V output ±10 V output ± 5 V output ± 1 V output	≤ 600 Ω ≤ 550 Ω ≤ 1100 Ω ≤ 2200 Ω ≥ 10 kΩ ≥ 10 kΩ ≥ 10 kΩ ≥ 10 kΩ		
Insulation	By means of optocouplers, 4000V _{rms} output to measuring input 4000V _{rms} output to supply input	GSM kit type-tested for PQT	
RS422/RS485 (on request)	Multidrop bidirectional (static and dynamic variables) 2 or 4 wires, max. distance 1200m, termination directly on the module from 1 to 255, software programmable. MODBUS RTU/JBUS	Digital outputs (on request)	To be used as alarms and/or retransmission of the energy metering and/or outputs remotely controlled by the serial communication port. The outputs are completely programmable independently of the type of module being used.
Connections			
Addresses			
Protocol			
Data (bidirectional)		Pulse outputs (on request)	
Dynamic (reading only)	All variables, see also the table, "List of the connected variables".	Number of outputs Type	Up to 4 From 1 to 1000 pulses programmable for k-M-G Wh, k-M-G varh, open collector (NPN transistor) V _{ON} 1.2 VDC/ max. 100 mA V _{OFF} 30 VDC max. Outputs connectable to total and/or partial energy meters 220 ms (ON), ≥ 220 ms (OFF) According to DIN43864
Static (writing only)	All configuration parameters energy reset, activation of digital outputs.		
Data format	1 start bit, 8 data bit, no parity/even parity/odd parity, 1 stop bit	Pulse duration	220 ms (ON), ≥ 220 ms (OFF) According to DIN43864
Baud rate	9600 bit/s	Insulation	By means of optocouplers, 4000 V _{RMS} output to measuring inputs, 4000 V _{RMS} output to power supply input.
Insulation	By means of optocouplers, 4000 V _{RMS} output to measuring inputs 4000 V _{RMS} output to power supply input		
RS232 (on request)	Bidirectional (static and dynamic variables)	Notes	The outputs can be either open collector type or relay type (for the relay output refer to the specifications described in the "alarm outputs" section).
Connections	3 wires, max. distance 15m		
Data format	1 start bit, 8 data bit, no parity, 1 stop bit		

Output specifications (cont.)

Alarm outputs (on request)			
Number of set-points	Up to 4, independent		
Alarm type	Up alarm, down alarm with or without latch, phase asymmetry, phase loss, neutral loss.	Min. response time	DC 12-5A, 24VDC AC 15-2.5A, 250VAC DC 13-2.5A, 24VDC ≤ 150 ms, filters excluded, FFT excluded, setpoint on-time delay: "0s"
Monitoring of the variable	All the variables listed at the paragraph "List of the connectable variables".	Insulation	4000 V _{RMS} output to measuring input, 4000 V _{RMS} output to power supply input.
Set-point adjustment	0 to 100% of the electrical scale	Notes	The outputs can be either relay type or open collector type (for this latter one, see the specifications mentioned in the pulse outputs)
Hysteresis	0 to 100% of the electrical scale		
On-time delay	0 to 255 s		
Relay status	Selectable: normally de-energized or normally energized		
Output type	Relay, SPDT AC 1-8A, 250VAC		

Software functions

Operating mode selection	<ul style="list-style-type: none"> - Direct measurements for the power quality analysis (LV or MV/HV connection); - Indirect energy and power measurements by means of watt-hour meters (LV or MV/HV connection); - Direct measurements for the instantaneous variables (LV connection) and indirect measurements for the energy variables (LV or MV/HV). It's possible to add the management of gas and water metering to all of these working modes. 	Sampling management	Only for data logger. The sample stored within the selected time interval results from the continuous average of the measured values. The average is calculated (min. sample) with an interval within two following measurements of approx. 200 ms. The variables, up to 8 can be stored as average value, minimum and maximum instantaneous values. Minimum is intended as lowest value among those sampled in the programmed time interval. Maximum is intended as highest value among those sampled in the programmed time interval. See "The working mode of data logging".
Pulse weight	Water/gas meter inputs: selectable from 1 to 10000 pulses/m ³ , energy from 1 to 10000.00 imp/kWh/kvarh		
Transformer ratio	Up to 6000 (CT up to 30kA) Up to 6000 (VT up to 600kV)	Data management type: Memory size Battery life	FIFO 2Mb 10 years
Filters		Data logger function	The data are stored at time intervals from 1 to 60 min.; up to 8 instantaneous variables can be selected.
Filter operating range	0 to 99.9% of the input electrical scale.	Historical data storing time	Two different data logger function can be selected: - average calculation within the programmed time interval. - Minimum, maximum values and average calculation
Filtering coefficient	1 to 255		
Filter action	Display, alarms, serial outputs (fundamental variables: V, A, W and their derived ones).		
Event logging			
Type of data	Only with RS232+RTC module+ Data memory Alarms and max./min. (max. 480 events) stored with date (dd:mm:yy) and hour (hh:mm:ss) reference, data logger.		



Software functions (cont.)

Data format	tion within the programmed time interval. See the "Historical data storing time" table. date: day, month	time: hours, minutes, seconds, type of stored variable: variable value.
-------------	--	--

PqtSoft software: parameter programming and memory data transfer

PqtSoft Network	English language software to transfer memory data and write messages to be coupled to the SMS alarms, plus modem communication management. The program runs under Windows /95/98/98SE/2000/NT/XP. Three different working modes can be selected: - management of a local RS485 network; - management of modem communication from a single instrument to PC (data download); - management of modem communication from local networks (RS485 communication) to a common PC (data download). In pre-formatted XLS files (Excel data base). The instantaneous and the	Data Transfer Modem communication	energy, gas, water variables are stored into two separated files. Manual or automatic at programmable timings. Phone book management (save up to 100 numbers). Each number is associated to a modem that corresponds either to the single instrument or to a network of instruments. Each network can manage up to 255 local instruments.
Working mode			
Data Storing		PqtSoft Remote	English language software to program the working parameters of the transducer The program runs under Windows 95/98/98SE/2000/NT/XP.
		Data access	By means of RS232 serial port to be coupled to a GSM or analogue modem or RS485 port (also multi-drop availability.).

General Specifications

Operating Temperature	0 to +50°C (32 to 122°F) (R.H. < 90% non-condensing)	Product	Energy measurements: EN61036, EN61268. DIN43864
Storage temperature	-30 to +60°C (-22 to 140°F) (R.H. < 90% non-condensing)	Pulse output	
Insulation reference voltage	300 V _{RMS} to ground (AV5 input)	Approvals	CE UL and CSA
Insulation	4000 V _{RMS} between all inputs/outputs to ground	Connector	Screw-type max. 2.5 mm ² wires (2x 1.5mm ²)
Dielectric strength	4000 V _{RMS} for 1 minute	Housing Dimensions Material	90x90x140 mm ABS, self-extinguishing: UL 94 V-0
Noise Rejection CMRR	100 dB, 48 to 62 Hz	Protection degree	Front: IP20
EMC	EN 50081-2, EN 50082-2	Weight	Approx. 600 g (packing included)
Other standards Safety	IEC 61010-1, EN 61010-1		



Supply specifications

AC/DC voltage	90 to 260V (standard) 18 to 60V (on request)	Power consumption	≤ 30VA/12W (90 to 260V) ≤ 20VA/12W (18 to 60V)
---------------	---	-------------------	---

Harmonic distortion analysis

Analysis principle	FFT	harmonic of "I" of the same order. According to the value of the electrical angle, it is possible to know if the distortion is absorbed or generated. Note: if the system has 3 wires the angle cannot be measured.
Harmonic measurement Current Voltage	Up to the 50 th harmonic Up to the 50 th harmonic	
Type of harmonics	THD (VL1) THD odd (VL1) THD even (VL1) The same for the other phases: L2, L3. THD (AL1) THD odd (AL1) THD even (AL1) The same for the other phases: L2, L3.	Harmonic details THD % / RMS value THD even % / RMS value THD odd% / RMS value single harmonics in % / RMS value
Harmonic phase angle	The instrument measures the angle between the single harmonic of "V" and the single	System The harmonic distortion can be measured in single-phase, 3-wire or 4-wire systems. Tw: 0.02

Time period management (energy, water and gas metering)

Time periods	Energy Selectable: single time, dual time and multi-time	Energy metering recording	Energy consumption history, recording of energy metering by months, oldest data: 2 months before current date. Recording of total and partial energy metering. Energy metering recording (EEPROM) Max. 999,999,999.99 kWh/kvarh.
Single time Number of meters	Energy, water, gas Total: 4 (kWh+/kvar+) from 0.00 to 999,999,999.99 (no partial meters) (kWh-/kvar-) from 0.00 to -999,999,999.99	<p>Management concept (multi-time)</p> <p>(a) $+Wh, +varh (-Wh, -varh)^*$</p> <p>max. 4</p> <p>(b) Time period (24 hours)</p> <p>max. 3</p> <p>(c) Season (12 months)</p> <p>Partial: up to 48 meters (a x b x c)</p> <p>Total: up to 4 meters ("a" type)</p>	
Dual time Number of meters	Energy, gas Total/partial: 4 (kWh+/kvar+) from 0.00 to 999,999,999.99 (kWh-/kvar-) from 0.00 to -999,999,999.99		
Time periods	2, programmable within 24 hours		
Multi-time Number of meters	Energy Total: 4; partial: 48 (kWh+/kvar+) from 0.00 to 999,999,999.99 (kWh-/kvar-) from 0.00 to -999,999,999.99	<p>* Only if measuring analogue inputs are present.</p>	
Time periods	4, programmable within 24 hours		
Time seasons	3, programmable within 12 months;		
Pulse output	Connectable to total and/or partial meters (dual time, multi-time periods)		

Function Description

Input and output scaling capability. Working of the analogue outputs (y) versus input variables (x)

Figure A

The sign of measured quantity and output quantity remains the same. The output quantity is proportional to the measured quantity.




Figure D

The sign of measured quantity and output quantity remains the same. With the measured quantity being zero, the output quantity already has the value $Y1 = 0.2 Y2$. Live zero output.




Figure B

The sign of measured quantity and output quantity changes simultaneously. The output quantity is proportional to the measured quantity.




Figure E

The sign of the measured quantity changes but that of the output quantity remains the same. The output quantity steadily increases from value X1 to value X2 of the measured quantity.




Figure C

The sign of measured quantity and output quantity remains the same. On the range X0...X1, the output quantity is zero. The range X1...X2 is delineated on the entire output range $Y0 = Y1...Y2$ and thus presented in strongly expanded form.





Figure F

The sign of the measured quantity remains the same, that of the output quantity changes as the measured quantity leaves range X0...X1 and passes to range X1...X2 and vice versa.



Used calculation formulas

Phase variables

Instantaneous effective voltage

$$V_{IN} = \sqrt{\frac{1}{n} \cdot \sum_1^n (V_{INi})^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_1^n (V_{INi}) \cdot (A_1)_i$$

Instantaneous power factor

$$\cos\phi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (A_1)_i^2}$$

Instantaneous apparent power

$$VA_1 = V_{IN} \cdot A_1$$

Instantaneous reactive power

$$VAR_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

System variables

Equivalent three-phase voltage

$$V_{\Sigma} = \frac{V_{12} + V_{23} + V_{31}}{3}$$

Three-phase reactive power

$$VAR_{\Sigma} = (VAR_1 + VAR_2 + VAR_3)$$

Neutral current

$$An = \overline{A_{L1}} + \overline{A_{L2}} + \overline{A_{L3}}$$

Three-phase active power

$$W_{\Sigma} = W_1 + W_2 + W_3$$

Three-phase apparent power

$$VA_{\Sigma} = \sqrt{W_{\Sigma}^2 + VAR_{\Sigma}^2}$$

Three-phase power factor

$$\cos\phi_{\Sigma} = \frac{W_{\Sigma}}{VA_{\Sigma}} \quad (\text{TPF})$$

Total harmonic distortion

$$THDi = \frac{\sqrt{\sum_{i=2}^n T_{i,1}^2}}{T_{1,1}}$$

Where:

i = considered phase (L1, L2 or L3)

T = considered variable (V or A)

n = harmonic order

Energy metering

$$kWh_i = \int_{t_1}^{t_2} P_i(t) dt \cong \Delta t \sum_{n_1}^{n_2} P_{i,j}$$

$$kVarh_i = \int_{t_1}^{t_2} Q_i(t) dt \cong \Delta t \sum_{n_1}^{n_2} Q_{i,j}$$

Where:

i = considered phase (L1, L2 or L3)

P = active power

Q = reactive power

t_1, t_2 = starting and ending time points of consumption recording

n = time unit

Δt = time interval between two successive power consumptions


n_1, n_2 = starting and ending discrete time points of consumption recording



Historical data storing time table

Time interval (minutes)	Average values only			2 Selected variables			4 Selected variables			6 Selected variables			8 Selected variables		
	Data storing time			Data storing time			Data storing time			Data storing time					
	DAYS	WEEK	YEARS	DAYS	WEEK	YEARS	DAYS	WEEK	YEARS	DAYS	WEEK	YEARS	DAYS	WEEK	YEARS
1	122	17	-	81	12	-	61	9	-	49	7	-			
5	610	87	1.7	407	58	1.1	305	44	-	244	35	-			
10	-	174	3.4	814	116	2.2	610	87	1.7	488	70	1.3			
15	-	262	5.0	-	174	3.4	915	131	2.5	732	105	2			
20	-	349	6.7	-	232	4.5	-	174	3.4	976	139	2.7			
25	-	436	8.4	-	291	5.6	-	218	4.2	-	174	3.4			
30	-	523	10.1	-	349	6.7	-	262	5	-	209	4			
35	-	610	11.7	-	407	7.8	-	305	5.9	-	244	4.7			
40	-	697	13.4	-	465	8.9	-	349	6.7	-	279	5.4			
45	-	785	15.1	-	523	10.1	-	392	7.5	-	314	6			
50	-	872	16.8	-	581	11.2	-	436	8.4	-	349	6.7			
55	-	959	18.4	-	639	12.3	-	479	9.2	-	384	7.4			
60	-	-	20.1	-	697	13.4	-	523	10.1	-	418	8			
Average + Min + Max values															
1	73	10	-	43	6	-	31	4	-	24	3	-			
5	365	52	1	215	31	-	153	22	-	118	17	-			
10	732	104	2	431	62	1.2	305	44	-	236	34	-			
15	-	156	3	646	92	1.8	458	65	1.3	354	51	1			
20	-	208	4	861	123	2.4	610	87	1.7	472	67	1.3			
25	-	262	5	-	154	3	763	109	2.1	591	84	1.6			
30	-	314	6	-	185	3.5	915	131	2.5	709	101	1.9			
35	-	366	7	-	215	4.1	-	153	2.9	827	118	2.3			
40	-	418	8	-	246	4.7	-	174	3.4	945	135	2.6			
45	-	471	9.1	-	277	5.3	-	196	3.8	-	152	2.9			
50	-	523	10.1	-	308	5.9	-	218	4.2	-	169	3.2			
55	-	575	11.1	-	338	6.5	-	240	4.6	-	186	3.6			
60	-	628	12.1	-	369	7.1	-	262	5	-	202	3.9			

The working mode of data logging

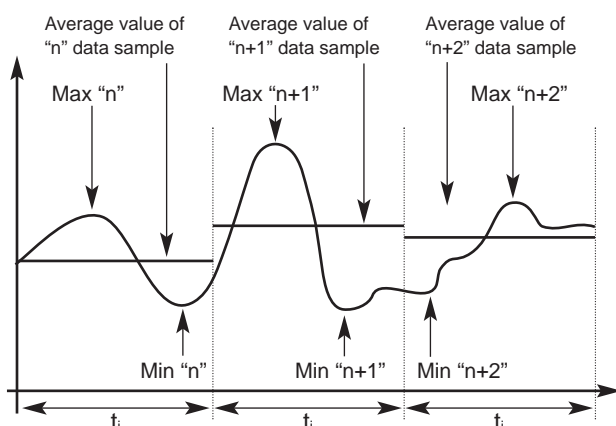

t_i = time interval (programmable from 1 to 60 minutes)

The PqtSoft network potential

Download data files from PQT to PC

Type of Network	No. of Network	No. of PQT	Port	Local Accessory	PC Accessory	User	◆
Local	1	1	AR1041 (RS232)	None	None	PC	A
Local	1	255	AR1041 AR1034	None	SIU-PC	PC	B
Remote	100	1	AR1041 (RS232)	Analogue modem	Analogue modem	PC	A
Remote	100	1	AR1041 (RS232)	GSM modem	Analogue modem	PC	C
Remote	100	255	AR1041 AR1034 (RS485)	SIU-PC+ analogue modem	Analogue modem	PC	B
Remote	100	255	AR1041 AR1034 (RS485)	SIU-PC+ GSM modem	Analogue modem	PC	B

◆ **Notes:**

- A- Only data download
- B- Data download. Each AR1041 can be connected to a GSM modem in order to manage the SMS messages.
- C- The PQT can be set to manage the data download or to manage SMS messages.

List of the variables that can be connected to:

- Max./Min. variable detection
- Alarm outputs
- Analogue outputs

No	Variable	1-phase system	3-ph. 4-wire balanced sys.	3-ph. 4-wire unbal. sys.	3 ph. 3-wire bal. sys.	3 ph. 3-wire unbal. sys.	meas. module not available	Notes
1	V L1	x	x	x	o	o	o	
2	V L2	o	x	x	o	o	o	
3	V L3	o	x	x	o	o	o	
4	V L-N sys	o	x	x	o	o	o	Sys = system = Σ
5	V L1-2	o	x	x	x	x	o	
6	V L2-3	o	x	x	x	x	o	
7	V L3-1	o	x	x	x	x	o	
8	V L-L sys	o	x	x	x	x	o	Sys = system = Σ
9	A L1	x	x	x	x	x	o	
10	A L2	o	x	x	x	x	o	
11	A L3	o	x	x	x	x	o	
12	An	o	x	x	x	x	o	
13	W L1	x	x	x	o	o	o	
14	W L2	o	x	x	o	o	o	
15	W L3	o	x	x	o	o	o	
16	W sys	o	x	x	x	x	o	Sys = system = Σ
17	var L1	x	x	x	o	o	o	
18	var L2	o	x	x	o	o	o	
19	var L3	o	x	x	o	o	o	
20	var sys	o	x	x	x	x	o	Sys = system = Σ
21	VA L1	x	x	x	o	o	o	
22	VA L2	o	x	x	o	o	o	
23	VA L3	o	x	x	o	o	o	
24	VA sys	o	x	x	x	x	o	Sys = system = Σ
25	PF L1	x	x	x	o	o	o	
26	PF L2	o	x	x	o	o	o	
27	PF L3	o	x	x	o	o	o	
28	PF sys	o	x	x	x	x	o	Sys = system = Σ
29	Hz	x	x	x	x	x	o	
30	THD V1	x	x	x	x	x	o	FFT V1-A1 ON
31	THDo V1	x	x	x	x	x	o	FFT V1-A1 ON
32	THDe V1	x	x	x	x	x	o	FFT V1-A1 ON
33	THD V2	o	x	x	x	x	o	FFT V2-A2 ON
34	THDo V2	o	x	x	x	x	o	FFT V2-A2 ON
35	THDe V2	o	x	x	x	x	o	FFT V2-A2 ON
36	THD V3	o	x	x	x	x	o	FFT V3-A3 ON
37	THDo V3	o	x	x	x	x	o	FFT V3-A3 ON
38	THDe V3	o	x	x	x	x	o	FFT V3-A3 ON
39	THD A1	x	x	x	x	x	o	FFT V1-A1 ON
40	THDo A1	x	x	x	x	x	o	FFT V1-A1 ON
41	THDe A1	x	x	x	x	x	o	FFT V1-A1 ON
42	THD A2	o	x	x	x	x	o	FFT V2-A2 ON
43	THDo A2	o	x	x	x	x	o	FFT V2-A2 ON
44	THDe A2	o	x	x	x	x	o	FFT V2-A2 ON
45	THD A3	o	x	x	x	x	o	FFT V3-A3 ON
46	THDo A3	o	x	x	x	x	o	FFT V3-A3 ON
47	THDe A3	o	x	x	x	x	o	FFT V3-A3 ON
48	VA dmd	x	x	x	x	x	x	
49	PF avg	x	x	x	x	x	x	
50	W dmd	x	x	x	x	x	x	◆
51	var dmd	x	x	x	x	x	x	
52	ASY	o	x	x	x	x	o	

(x) = available (o) = not available

◆ Notes: the alarm outputs can be connected to Wdmd total and/or Wdmd tariff1, Wdmd tariff2, Wdmd tariff3, Wdmd tariff4.

The available modules

The possible module combinations

Type	N. of channels	Ordering code
PQT-90 base		AD1047
AV5.3 measuring inputs		AQ1018
AV7.3 measuring inputs		AQ1019
18-60VAC/DC power supply		AP1021
90-260VAC/DC power supply		AP1020
20mADC analogue output	1	AO1050
10VDC analogue output	1	AO1051
±5mADC analogue output	1	AO1052
±10mADC analogue output	1	AO1053
±20mADC analogue output	1	AO1054
±1VDC analogue output	1	AO1055
±5VDC analogue output	1	AO1056
±10VDC analogue output	1	AO1057
20mADC analogue output	2	AO1026
10VDC analogue output	2	AO1027
±5mADC analogue output	2	AO1028
±10mADC analogue output	2	AO1029
±20mADC analogue output	2	AO1030
±1VDC analogue output	2	AO1031
±5VDC analogue output	2	AO1032
±10VDC analogue output	2	AO1033
RS485 port	1	AR1034
Relay output	1	AO1058
Relay output	2	AO1035
Open collector output	1	AO1059
Open collector output	2	AO1036
Open collector output	4	AO1037
Digital inputs	3	AQ1038
Digital inputs + AUX	3	AQ1042
RS232 port + RTC +2MB data memory (1)	1	AR1041




Basic unit	Slot A	Slot B	Slot C	Slot D
Single analogue output	●			
Dual analogue output	●	●		
RS485 port		●		
Single relay output (*)			●	●
Single open collector out (*)			●	●
Dual relay output (*)			●	●
Dual open coll. out (*)			●	●
4 open coll. output (*)				●
3 digital inputs			●	
3 digital inputs +aux	●		●	
Basic unit	Slot E			
RS232 port + RTC + 2MB data memory		●		

(*) Alarm or pulse.

(1) The RS232 communication port works as alternative of the RS485 module.




Wiring diagrams

Single phase input connections

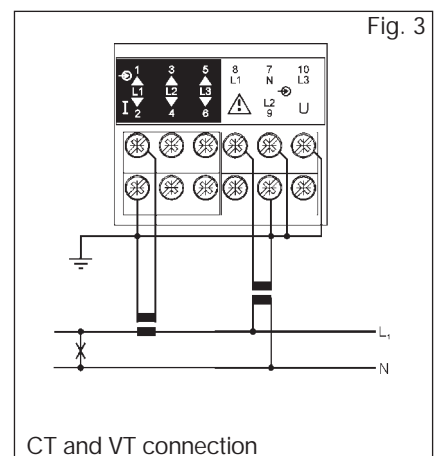
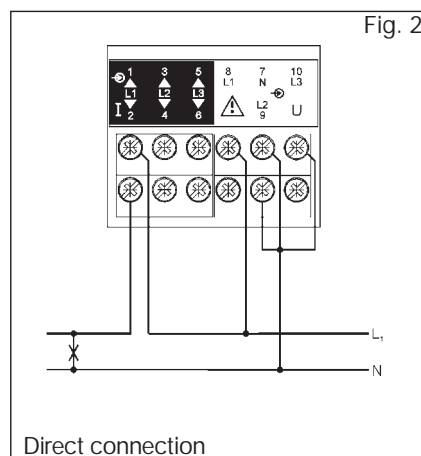
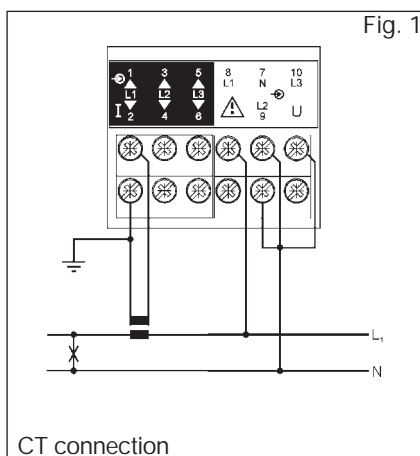


Wiring diagrams (cont.)




Three-phase, three-wire input connections - Balanced load

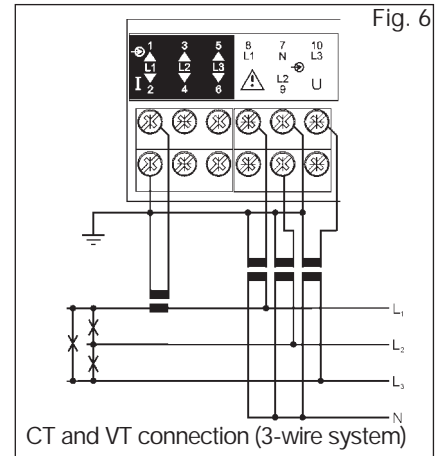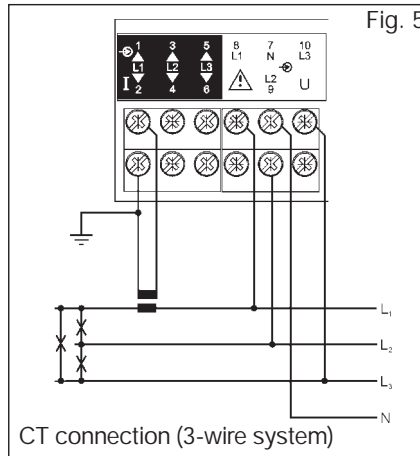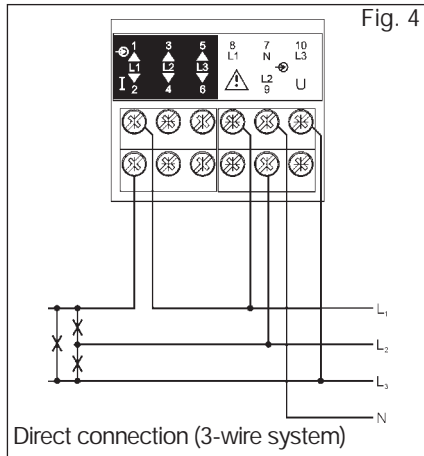

Three-phase, four-wire input connections - Balanced load

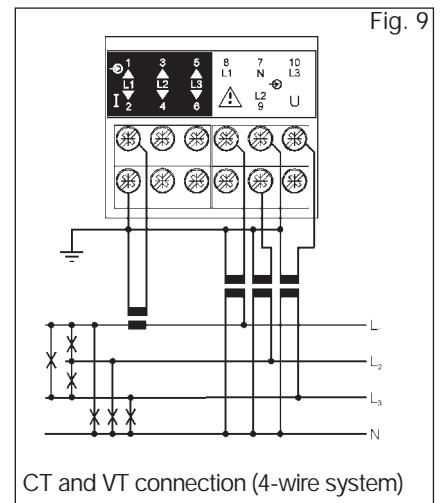
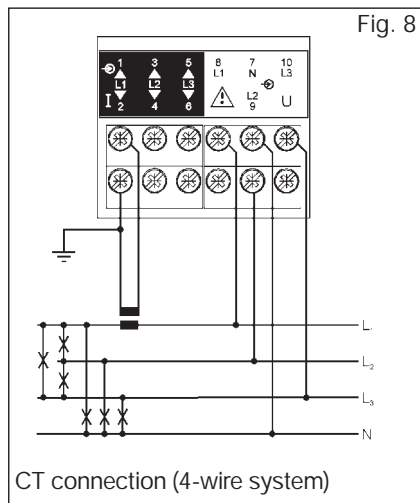
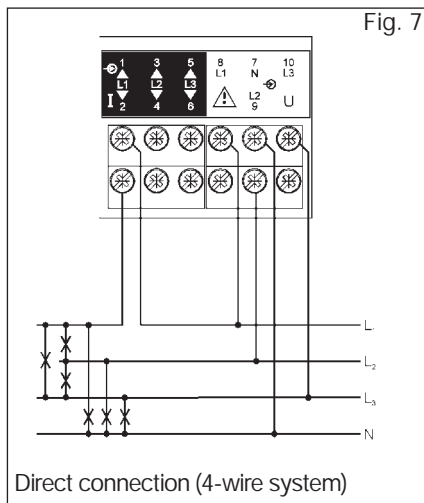


Three-phase, three-wire input connections - Unbalanced load

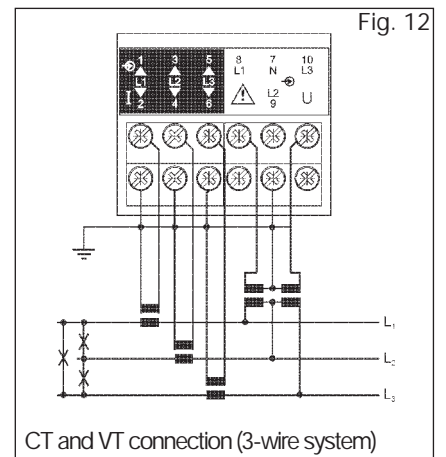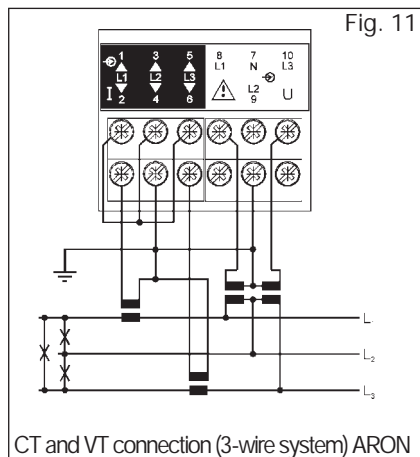
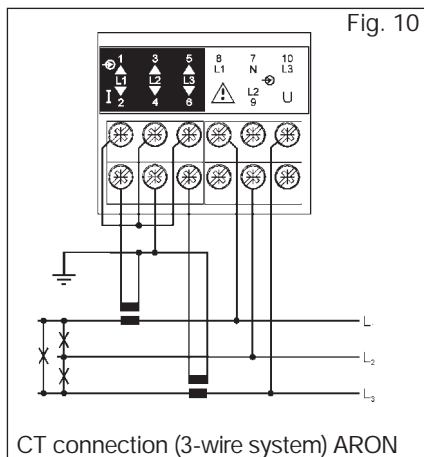


Wiring diagrams (cont.)


Three-phase, three and four-wires input connections - Unbalanced load

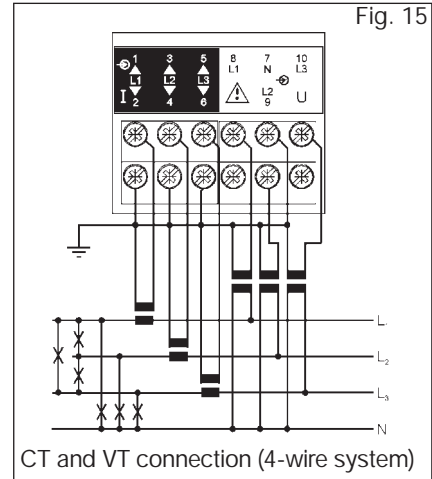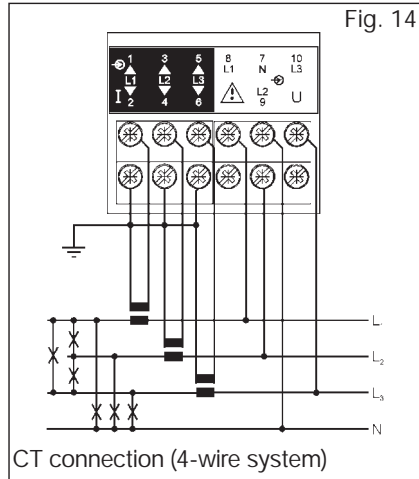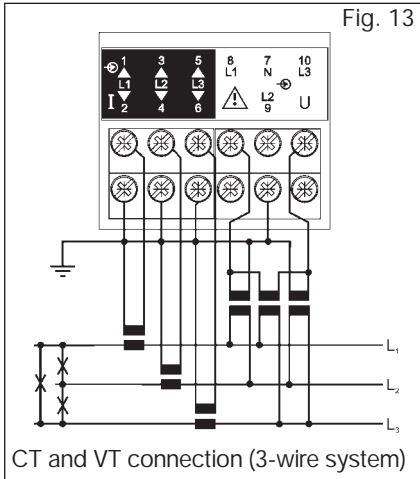

Wiring diagrams of optional modules

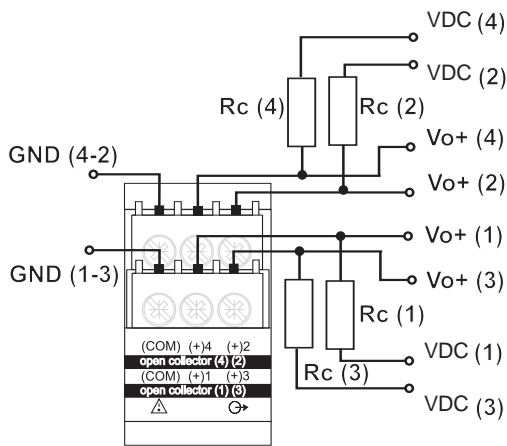


AO1058 1 relay output




AO1035 2 relay outputs

AO1037 4 open collector outputs: The load resistance (R_c) must be designed so that the closed contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30V.
VDC: power supply voltage output. Vo+: positive output contact (open collector transistor). GND: ground output contact (open collector transistor).

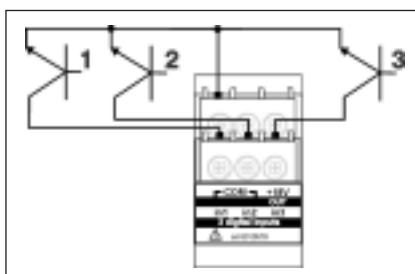


Connection by means of NPN transistor.
AQ1042 digital input module.

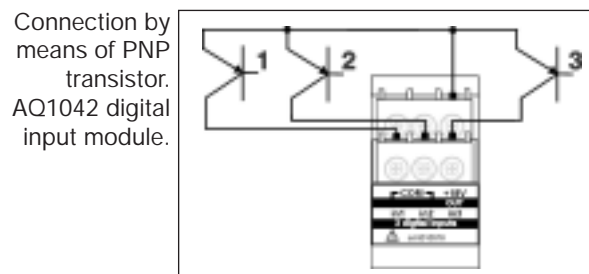


Connection by means of PNP transistor.
AQ1042 digital input module.


Wiring diagrams of optional modules (cont.)

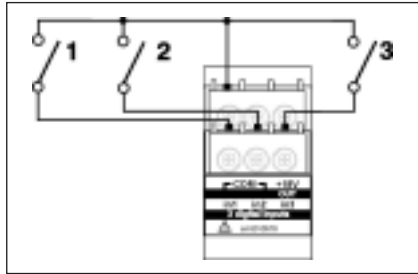


Connection by means of contacts.
AQ1042 digital input module.

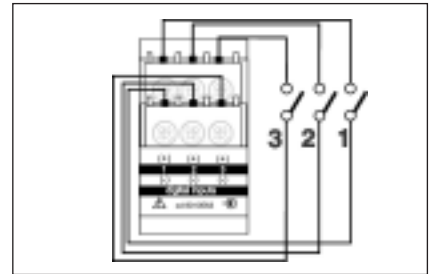

Connection by means of contacts.
AQ1038 digital input module.

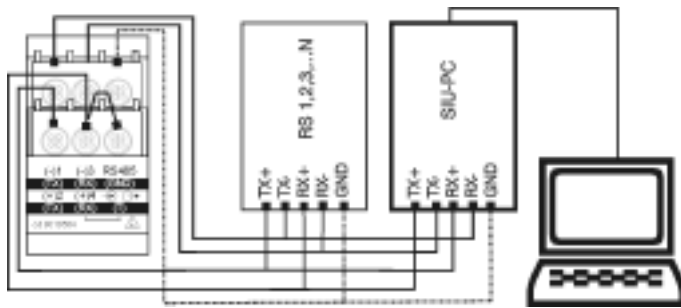


AR1034 RS422/485 4-wires connection: additional devices provided with RS422/485 (that is RS 1, 2, 3...N) are connected in parallel. The termination of the serial output is carried out only on the last instrument of the network, by means of a jumper between (Rx+) and (T).

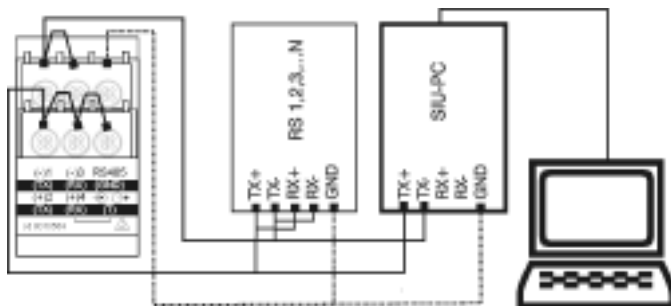

AR1034 RS422/485 2-wires connection: additional devices provided with RS422/485 (that is RS 1, 2, 3...N) are connected in parallel. The termination of the serial output is carried out only on the last instrument of the network, by means of a jumper between (Rx+) and (T).

Dimensions

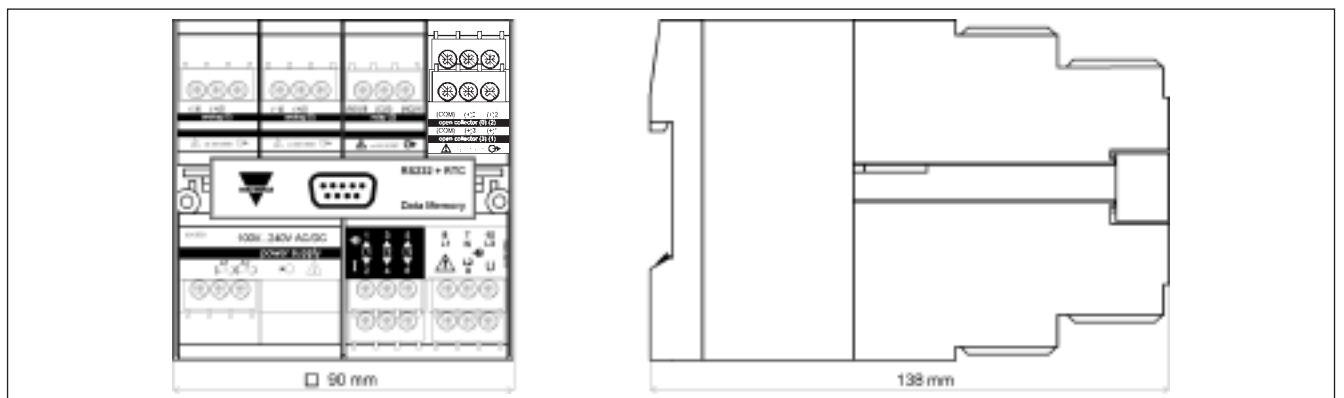


Modules


Power supply modules



AR1041
RS232 Port + RTC+2MB Data memory




AP1021
Power supply 18-60VAC/DC




AP1020
Power supply 90-260 VAC/DC

Single analogue output modules




- AO1050** (20mADC)
- AO1051** (10VDC)
- AO1052** (± 5 mADC)
- AO1053** (± 10 mADC)
- AO1054** (± 20 mADC)
- AO1055** (± 1 VDC)
- AO1056** (± 5 VDC)
- AO1057** (± 10 VDC)

Dual analogue outputs




- AO1026** (20mADC)
- AO1027** (10VDC)
- AO1028** (± 5 mADC)
- AO1029** (± 10 mADC)
- AO1030** (± 20 mADC)
- AO1031** (± 1 VDC)
- AO1032** (± 5 VDC)
- AO1033** (± 10 VDC)


Digital output modules




AO1058
Single relay output



AO1035
Dual relay output




AO1059
Single open collector output




AO1036
Dual open collector output

Digital output modules




AO1037
4 open collector outputs


Other input/output modules



AQ1038
3 digital inputs



AQ1042
3 digital inputs + aux



AR1034
RS485 Port